

»» **Transparent flexible LED screen**




Hot

Hot

Model	P5-10	P4-8	P6.6	P7	P8	P10	P12	P14	P16
Pitch	5*10mm	4*8mm	6.6*6.6mm	7*7mm	8*8mm	10*10mm	12*12mm	14*14mm	16*16mm



Light weight



Seamless splicing



Good light transmittance



lower calorific power



low-energy




Good protective performance

Product superiority



Free cutting

The appropriate size can be tailored according to the use environment. Good applicability.

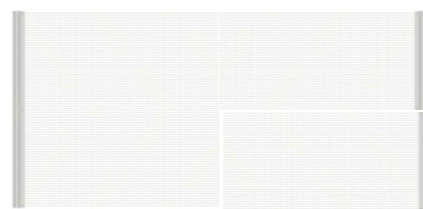


Seamless splicing

Modular screen, easy to install, easy maintenance.



Flexible material

Using soft material, lighter, thinner, strong plasticity, a wide range of application.

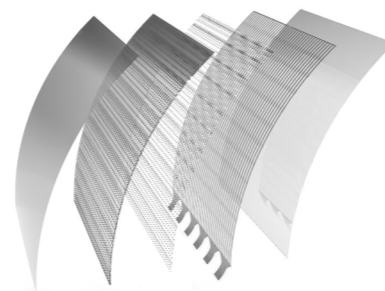

Multiple protection

The product adopts multiple protective structure, with excellent waterproof performance.

Application



Parameter

Model	P4*8	P5*10	P6	P7	P8	P10	P12	P14	P16
Pitch	4*8mm	5*10mm	6*6mm	7*7mm	8*8mm	10*10mm	12*12mm	14*14mm	16*16mm
Pixel density	31250dots/m ²	20000dots/m ²	27889dots/m ²	20449dots/m ²	15625dots/m ²	10000dots/m ²	6889dots/m ²	5041dots/m ²	3844dots/m ²
Module Max Size	500*1300mm (The module size can be customized.)								
Pixel composition	1R1G1B								
Brightness	≤2500cd/m ²								
Viewing Angle	H:160° V: 160°								
Permeability	≤60%		≤65%		≤80%			≤85%	
Input voltage	110V / 240V								
Power	250-1000W / m ²								
Work environment	Temperature:-20~55°C ; Humidity: 10~90%								
Thickness	≤3mm								
Module weight	1~3kg/m ²								
Drive mode	Static state								
Control system	Nova / Colorlight								
Colour temperature	2000~15000K								
Refresh Rate	3840Hz / 7680Hz								
Lifetime	100000H								